



ELECTRIC FENCING

JVA JUMBO RANGE



2020/2021


www.jva-fence.com.au

Introduction

The JMB series is the most powerful and feature rich electric fence energizer JVA has manufactured to date. This continues JVA's push for technical superiority in the area of Monitored Electric Fencing and IP Energizers®. While the JMB energizers were specifically designed for game parks and exclusion fencing, they are also well suited to any large permanent electric fencing application. The JMB series produces up to a remarkable 46J of stored energy, currently the world's largest battery powered energizer.

A monitored electric fence reduces maintenance by reporting whenever there is a fault and by allowing you to check the fence from wherever you are using the Internet.

The JMB series introduces the JVA Virtual Keypad. This allows you to monitor, control and program the energizer from your Wi-Fi enabled smart device (phone, tablet or laptop). The JMBs can also be controlled and monitored with a wired JVA 4-Line Keypad supplied with each unit.

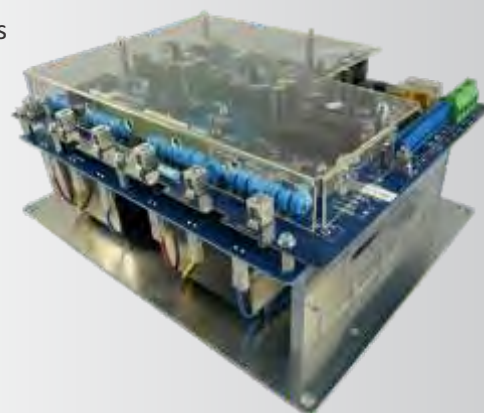

Features

- Combined electric fence energizer and monitor
- Power or Loop monitor depending on model
- Virtual Keypad via your Wi-Fi enabled device (smart phone, laptop, etc.)
- Distant Fault Detection (DFD™) technology
- High powered (up to 46 joules stored)
- Mains or 12V battery powered (mains via supplied 24V plug pack)
- Lightning protection on all fence connections
- No mains inverter required to run on solar and battery
- Power on demand i.e. it uses only the power it needs for the fence conditions
- Able to be controlled and/or monitored through multiple options:
 - Virtual Keypad using on board Wi-Fi
 - Cloud Router (requires a Cloud Router account and Gateway)
 - Perimeter Patrol (requires a PC, TCP/IP Interface and Perimeter Patrol Licence)
 - Most JVA Z-Series Keypads (4-Line or Touch screen Keypad)
 - Fence Line Remote Control
- Built-in 1A backup battery charger
- 1 Siren and 2 Strobe 12V outputs for stand-alone security installations (switched 12V DC) On/Off switch
- Programmable relays



24/7 Fence Information available via GSM or Wi-Fi



Virtual Keypad Programming via Smart Device

By incorporating Power Monitoring and our patented, Distant Fault Detection (DFD™) technology, the JMB ZM1 and JMB ZM2 models can be configured to monitor long fences without the need to create loops or install return wires to connect the end of the fence voltage back to the energizer. This is also known as *Start of Fence* monitoring. For those who wish to use traditional *End of Fence* monitoring, these models also have an optional fence return terminal.

JVA Jumbo Range

JMB ZM1

The JMB ZM1 contains circuitry that allows it to power and monitor a single, high power fence zone. The Power Monitor measures both the real and reactive components of the fence voltage and feed current. By doing so, it can detect a fault at distances beyond 10km from the energizer.

Features

- Up to 46 joules (stored) for better performance on long fences
- Measures feed, return and the ground voltage
- Measures real and reactive feed currents to distinguish real faults from capacitive fence currents
- The JMB ZM1 contains our patented Power Monitor with Distant Fault Detection (DFD™)

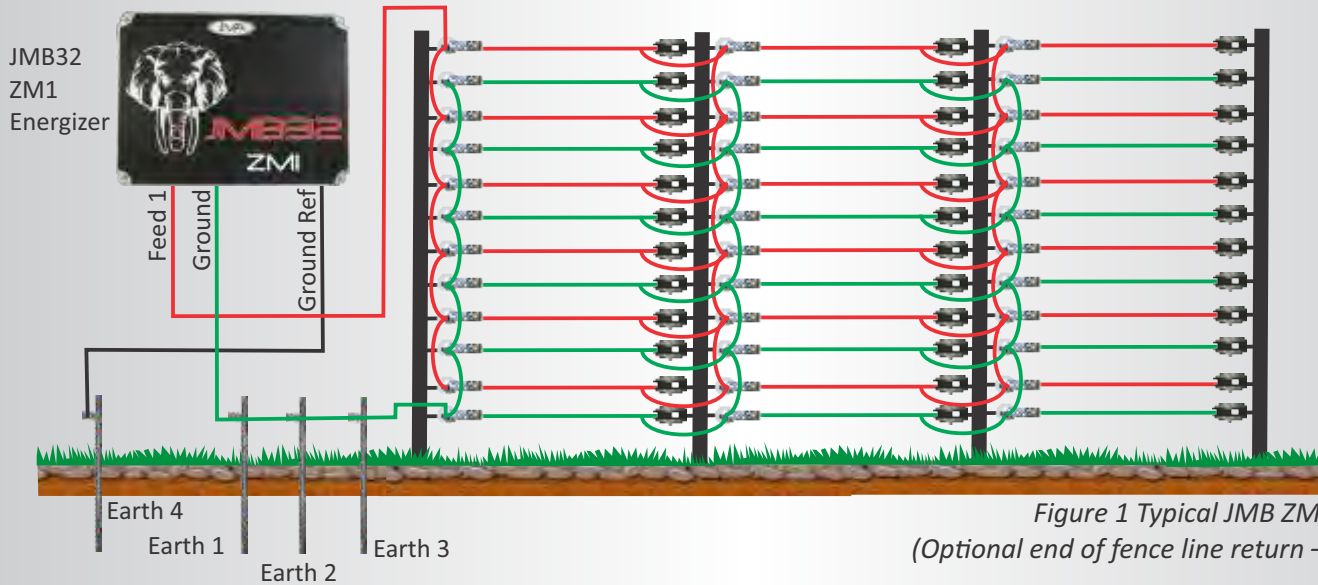


Figure 1 Typical JMB ZM1 DFD Setup
(Optional end of fence line return – not shown)

JMB ZM2

The JMB ZM2 contains circuitry that allows it to power two separate fences. Each fence has its own Power Monitor and optional fence return terminal for end of fence voltage monitoring.

Features

- Two independent fence zones each with up to 23J (stored)
- Synchronized outputs can be bridged for 46J (stored) into one fence
- Measures both zones feed and return and the ground voltage
- Measures real and reactive feed currents to distinguish real faults from capacitive fence currents

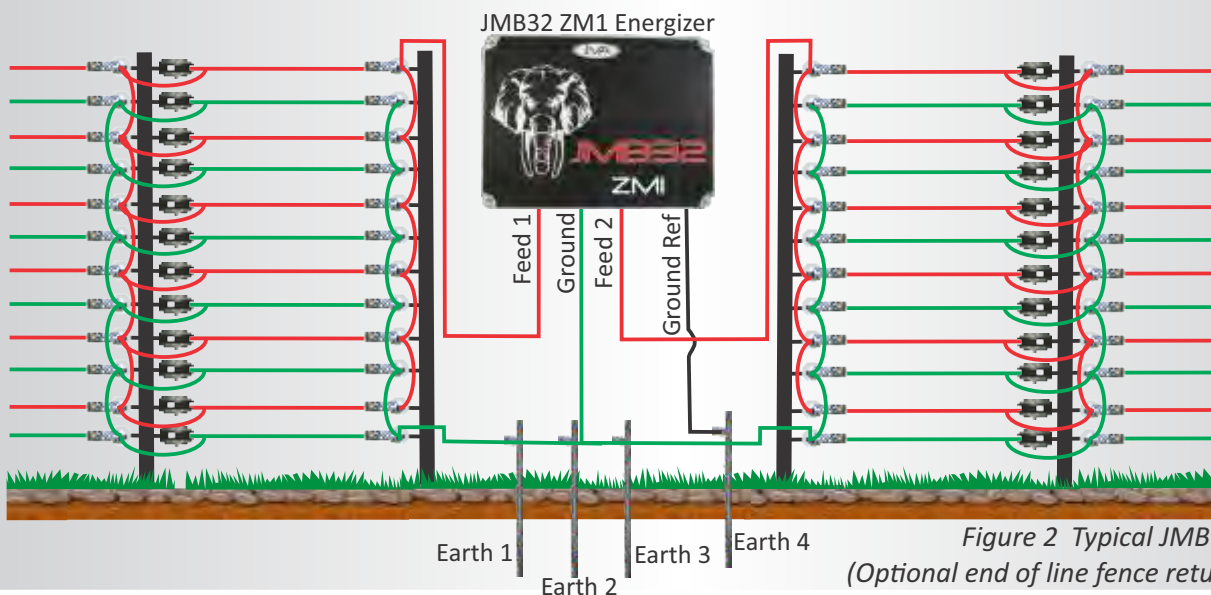


Figure 2 Typical JMB ZM2 DFD Setup
(Optional end of line fence return – not shown)

JVA Jumbo ZM50

JMB ZM50

The JMB ZM50 contains our patented Loop Monitor with Distant Fault Detection (DFD™). The loop or loops of live wires may run down and back on the same fence or all the way around a property.

While previous fence loop monitors suffered from a range limitation of approximately 10km of fence or 30km of wire, DFD™ has greatly increased this range.

Features

- Can split a single fence into up to 50 sectors
- Can report the position of a fault as a percentage of overall fence length
- Short sectors can be accurately defined using JVA sector dividers
- ELV (Extra Low Voltage) open circuit detection

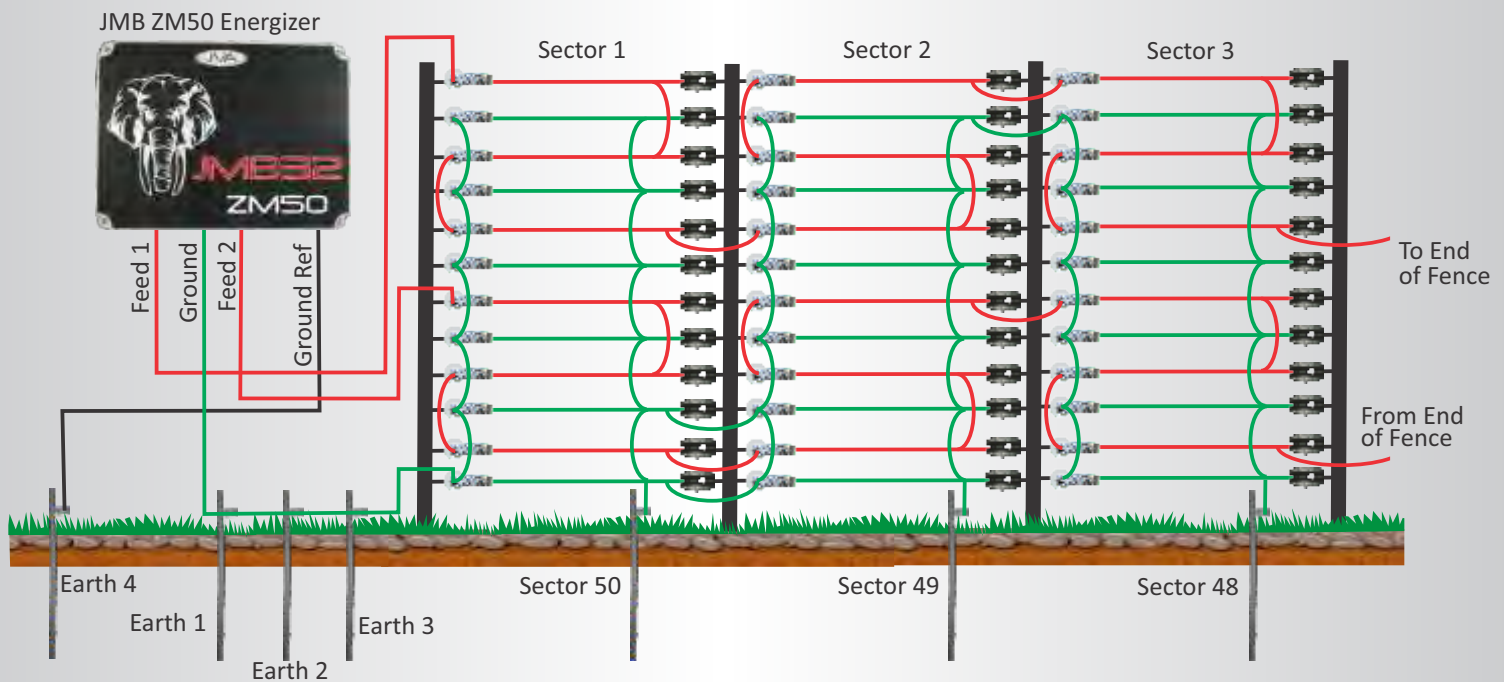


Figure 3: Typical JMB ZM50 Setup

JVA Jumbo Range Specifications

Model	Stored Energy	Output Energy	Zones	Sectors	Input Voltage	Power Peak
JMB32ZM1	46	32	1	0	12/24V	3.6A at 13.5V DC
JMB32ZM2	2x23	2x16	2	0	12/24V	3.6A at 13.5V DC
JMB32ZM50	46	32	1	Up to 50	12/24V	3.6A at 13.5V DC
JMB25ZM1	36	25	1	0	12/24V	2.8A at 13.5V DC
JMB25ZM2	2x18	2x12.5	2	0	12/24V	2.8A at 13.5V DC
JMB25ZM50	36	25	1	Up to 50	12/24V	2.8A at 13.5V DC
JMB16ZM2	23	2x8	2	0	12/24V	2.5A at 13.5V DC
JMB8ZM1	11.5	8	1	0	12/24V	1.8A at 13.5V DC
JMB10ZM2	14	2x5	2	0	12/24V	2.0A at 13.5V DC
JMB8ZM50	11.5	8	1	Up to 50	12/24V	1.8A at 13.5V DC

Solar Recommendation 32 Joule Units	Area Table 6 Hours Sun	350W	200Ah Battery
Solar Recommendation 25 Joule Units	Area Table 6 Hours Sun	300W	200Ah Battery
Solar Recommendation 8 Joule Units	Area Table 6 Hours Sun	150W	100Ah Battery

JVA Perimeter Patrol

JVA Perimeter Patrol provides a visual representation (mimic) of the property secured by the electric fence system. JVA Perimeter Patrol can be used to quickly view the status and voltages of electric fences and devices; alert and email the user when the fences, gates or other devices need attention; arm/disarm electric fences according to a custom schedule and remotely access electric fence systems.

Icons representing the energized zones are positioned over an image of the site map. Status and voltage information from the various zones throughout the site are updated in real time from a remote or central location. The PC speaker or external Input/Output interface board can be used to generate an audible alarm.

Using a Wi-Fi Network system around the farm, the Perimeter Patrol System can also be integrated into other management requirements such as CCTV, water management and gate control. The PP Input/Output Interface Board, when linked to the network, can operate pumps, gates, PTZ triggers centre pivots, etc. The Perimeter Patrol Software enables you to control and manage your property from anywhere in the world.

Zone	kV
Fence 1 (ZM1)	6.3
Trip 1 (ZM1)	8.5
Fence 2 (ZM1)	6.3
Fence 3 (ZM20)	6.0
Trip 3 (ZM20)	8.0
Fence 4 (ZM20)	7.4
Trip 4 (ZM20)	8.1
Fence 5 (ZM1)	7.9
Trip 5 (ZM1)	7.8
Fence 7 (ZM20)	8.3
Trip 7 (ZM20)	7.7
Fence 8 (ZM20)	7.9
Trip 8 (ZM20)	8.5
Fence 9 (ZM20)	8.6
Trip 9 (ZM20)	5.6
Fence 10 (ZM20)	8.1
Trip 10 (ZM20)	8.8



Perimeter Patrol Setup



Associated Items



Fault Finder



Wi-Fi Module



GPIO Board



GSM



Y-Type LDV



TCPIP Board



Perimeter Patrol



Android Keypad



ELECTRIC FENCING



AUSTRALIA



AFRICA



NEW ZEALAND



LATINO AMERICA



CARIBBEAN



SOUTH EAST ASIA



EUROPE



RUSSIA



INDIA



USA



MEXICO



BRAZIL



MALAYSIA



CENTRAL ASIA



UNITED KINGDOM



PAKISTAN



PANAMA



PHILIPPINES

JVA is manufactured and distributed by Pakton Group Pty Ltd
Trading as JVA Technologies

Head Office Australia

Phone (primary): 0499 000 455 or +61 499 000 455
Phone (secondary): (07) 3103 0582 or +61 7 3103 0582
Email: sales@jva-fence.com.au
Skype: jva.technologies

Address: 1 Helium Street
Narangba
Queensland
Australia

South Africa

Phone: 011 397 3507
e-mail: Gauteng – swilliamson@jva-fence.com.au
Postal PO Box 13898
Address: Cascades 3202
Website: www.jvasecurity.com

Address: 219 Jet Park Road
Aerostar Business Park
Johannesburg

Although the information presented in this product catalogue is believed to be accurate and reliable, no responsibility for inaccuracies can be assumed by Ndlovu Fencing. Performance data is typical only and variations owing to component manufacturing tolerances are normal.

www.jva-fence.com.au